

**GENERAL INFORMATION**

DRAWINGS ARE SCHEMATIC, DO NOT SCALE FOR ESTIMATING PURPOSES. QUALITY OF WORKMANSHIP SHALL BE OF A LEVEL EQUAL TO OR GREATER THAN LOCALLY ACCEPTED STANDARDS.

INSTALLATION SHALL BE GUARANTEED FOR A PERIOD OF ONE YEAR AGAINST DEFECTS IN MATERIALS AND WORKMANSHIP.

HORIZONTAL DRAINS SHALL HAVE A MINIMUM SLOPE OF 1/4" PER RUNNING FOOT. PIPES 3" IN DIAMETER AND GREATER MAY HAVE A SLOPE OF 1/8" PER RUNNING FOOT IF APPROVED BY LOCAL AUTHORITIES.

PREFERRED INSTALLATION BELOW CONCRETE SLABS SHALL BE TYPE "L" SOFT COPPER WITH NO JOINTS.

JOINTS IN PLASTIC PIPE OR TUBE BELOW CONCRETE SLABS SHALL BE INSTALLED USING WROUGHT COPPER FITTINGS WITH BRAZED JOINTS.

JOINTS IN PLASTIC PIPE OR TUBE BELOW CONCRETE SLABS SHALL BE INSTALLED USING PREVIOUSLY APPROVED FITTINGS AND BENDS.

LOCAL CODES WILL SUPERSEDE SIZES AND MATERIALS SHOWN ON DRAWING.

**MATERIALS**


- DRAINAGE PIPE SHALL BE:**
- STANDARD WEIGHT CAST IRON
  - PVC PLASTIC
- WATER SUPPLY PIPE SHALL BE:**
- TYPE "L" COPPER (BELOW SLABS)
  - TYPE "M" COPPER
  - CPVC PLASTIC

**ABBREVIATIONS AND SYMBOLS**

- A.C. = T = AIR CHAMBER
- B.D. = A = BOILER DRAIN
- C.O. = CLEAN OUT PLUG
- F.P.S.C. = FROST PROOF SILL COCK
- LAV. = LAVATORY
- P.R.V. = PRESSURE REDUCTION VALVE
- P&T = PRESSURE AND TEMPERATURE RELIEF VALVE
- SHWR. = SHOWER
- TUB = BATH/TUB
- V.T.R. = VENT THRU ROOF
- W.C. = WATER CLOSET
- W.H. = WATER HEATER
- W.M. = WASHING MACHINE
- ⊥ = THRU STOP VALVE
- ∠ = ANGLE STOP VALVE
- ⊥ = LEVER HANDLE STOP AND WASTE VALVE


- Ⓐ PRESSURE REDUCTION VALVE LOCATION (PROVIDE IF PRESSURE EXCEEDS 60#)
- Ⓑ APPROVED UNDER-SLAB INSTALLATION (SEE "GENERAL INFORMATION")
- Ⓒ SUPPLY FROM PUMP OR CENTRAL WATER SYSTEM
- Ⓓ OUTFALL TO SEPTIC TANK OR CENTRAL SEWER SYSTEM

**PLUMBING SCHEMATIC**

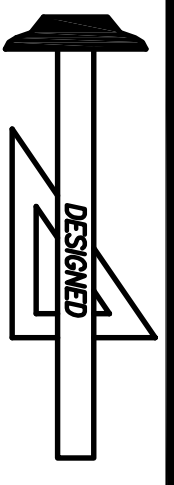

**Standard Homes Plan Service, Inc.**

7200 SUNSET LAKE ROAD FLOQUAY-VARINA, NC 27526 (919)552-5677

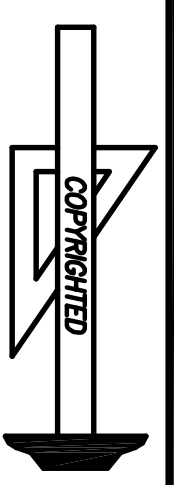

DESIGNED FOR	PLAN	NO.	SLAB
	STACY	2	